




VibrationWorld

DVC-4 Vibration Controller

- ❖ Swept Sine
- ❖ Random
- ❖ Classical Shock

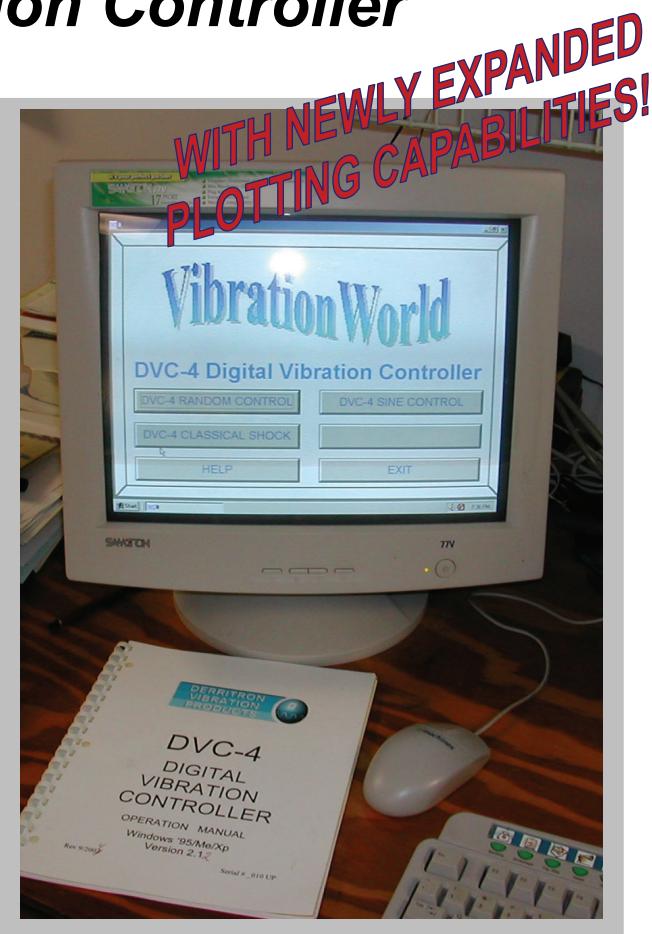

DVC-4 Features:



- Available with Sine, Random, and/or Shock software
- Established Reliability With 3-Year Warranty
- Lifetime FREE Software Upgrades
- Use With Any Windows PC- Single PCI Slot Required
- Easy to Install and Use- Ideal for Production Test and Small Systems
- Virtual Instrument Screen with Familiar Windows Functions
- 4 Input Channels with Current Sources standard
- NEW! 8 Input Channel option with dual controllers
- Remote Control via Hardware or Software
- Software Calibration with no Trim-pots; Calibration Procedure in Help File

DVC-4 Vibration Control System For Sine, Random and Classical Shock testing

The DVC-4 Vibration Control System was one of the first controllers to take advantage of the Windows Operating System, combining DSP hardware with the Windows interface. This has resulted in a vibration controller with unparalleled economics and ease-of-use. **The DVC-4 is fully compatible with Windows 98/Xp/Vista** and is available with any or all of the above control modes enabled.

Established Reliability

As the logical successor to the ISA slot DSC/DRC controllers, the DVC-4 has a ten-year history with DOS software and eight with Windows. With **over 1000 systems are in the field, the DVC is backed with a 3-year warranty and lifetime web support.**

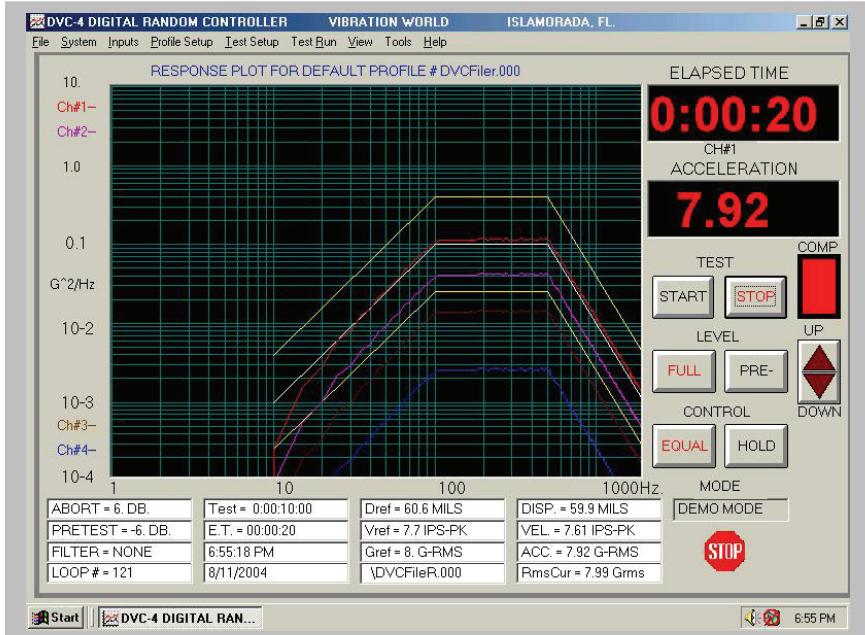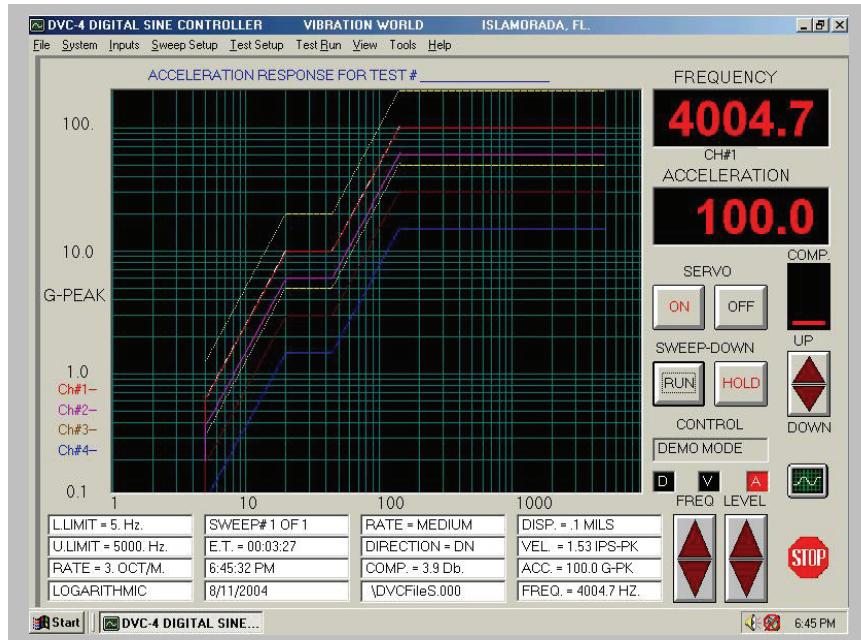

Built-In Accelerometer Current Sources

Simply connect the inputs to integrated accelerometers, turn on the current sources in the Inputs Menu, and run the test. The added expense and trouble of external charge-amps and power supplies are a thing of the past.

Virtual Instrument Screen

Your computer screen is turned into a "virtual instrument", with plotting, LED style readouts, control buttons and status indicators all arranged in an easy-to-read format. All of the setup details are hidden in drop-down menus. Common functions can be performed by mouse click, keyboard, or remote control. In addition, the monitor status bar provides the user a view of all test parameters for the current test.

4-Channel Input Standard

The sensitivity of each of the four input channels can be defined and a label may also be assigned along with a transducer serial number for future reference. The controller can be set to any combination of control or measurement channels.

Menu Setup

All of the details of the test setup are managed in familiar Windows drop-down menus; users will appreciate the familiar menu arrangement and quickly master entering test parameters.

Profile Setup

The Modify Profile screen defines the random PSD reference spectrum or sine D,V,A test schedule. Breakpoints can be defined in English or metric units and freely converted back and forth; up to 32 breakpoints can be defined for each test..

Free Software Upgrades

The software is typically updated semi-annually and the upgrades are posted on the web-site for downloading- always for free. Combined with the extended warranty and no service contracts, the economical purchase price is the total cost except for a readily available computer.


Demo Software

For training and product evaluation purposes, FREE Demo software is available on disk or via website download. The working software can also be used in a demo mode for training purposes.

Use With Any Computer

Why be locked into an obsolete computer? Use the DVC-4 with any available PC and upgrade as technology moves foreword. The DVC-4 requires only one PCI card slot to interface with the control module. The software

Revised 9/21/07

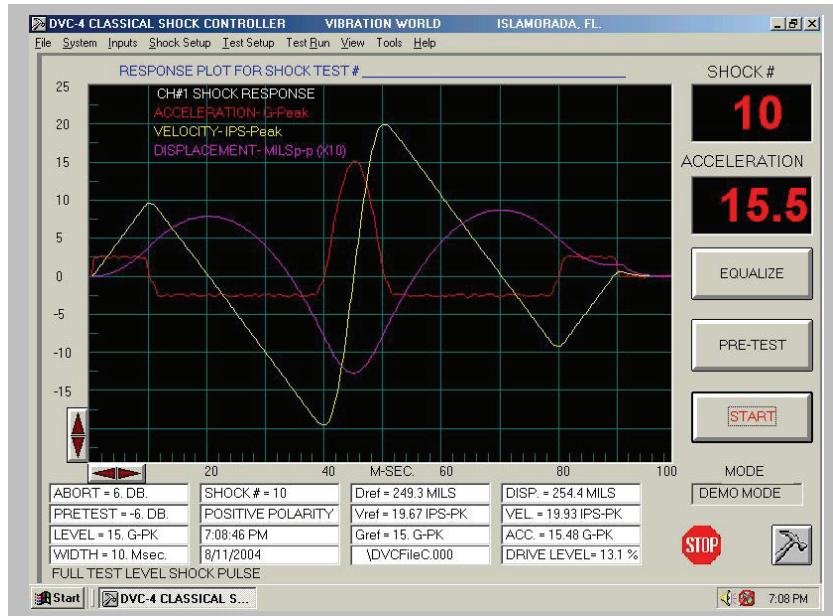

automatically resizes for use with any monitor. No ISA slots required!

Ease of Installation and Use

Operation of the DVC-4 controller can be mastered in minutes, without enduring the lengthy training period competitors require. This makes the DVC-4 well suited for production stress screening and small shops, where dedicated test labs and trained staff may not be present.

Remote Control

Common Start/Stop/Abort type functions can be controlled remotely by either logic signals or switch closures, or by software calls from another program to the DLL, enabling the DVC-4 to be integrated into test chambers and automated test systems.

Software Calibration

There are no trim-pots or adjustments; calibration is done in software. The calibration procedure is included in the help file.

Manual Mode

All three software packages can be operated in a manual mode, simulating sine and shaped random signal generators, and waveform generator in shock.




Software Package Specifications:

Sine Vibration Control Software Package

Frequency :	Range: 2 Hz to 10 KHz. Stability: +/- 100 Ppm/o C, crystal controlled Distortion: <0.50% thd, 0.25% typical Limits: sweeps between programmed lower and upper limits Linear, Logarithmic or MIL-167 Incremental
Sweep Mode:	Entered in Oct/min, Hz/sec, Hz/step
Sweep Rate:	• 0.1-99.9 Oct/Min or 0.1-99.9 Hz/sec.
Control Method:	Average, Extremal, or Manual
Control Channel:	Any combination of channels may be used for control and/or measurement
Dynamic Range:	Greater than 70 dB
Reference Profile:	<ul style="list-style-type: none"> Defined with any combination of Displacement, Velocity or Acceleration Up to 32 breakpoints may be defined Automatic crossover frequency calculation from Displacement, Velocity or Acceleration Two dwells points can be programmed for a specified time at any desired frequency point
Test Article Protection:	Automatic loop check for safety for open loop, low gain, over/under test and system limits
Displays:	Interactive Windows displays, allowing for real time user display changes. Display types include: <ul style="list-style-type: none"> Target Profile Response of selected channel Alarm and abort limits
Test Documentation:	Any of the above screens may be saved or printed out
Display Monitor	The monitor bar displays the setup conditions, test status, and reference and current displacement, velocity and acceleration values


DSC

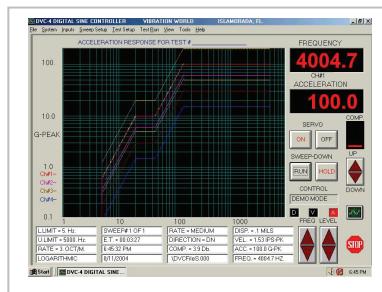

Random Vibration Control Software Package

DRC



Frequency Ranges:	2.5-500, 5-1000, 10-2000, 20-4000 Hz.
Spectral Resolution:	400 lines
Control Method:	Average, Extremal, or Manual
Control Channel:	Any combination of channels may be used for control and/or Measurement
Dynamic Range:	Greater than 60 dB
Loop Time:	500 milliseconds @ 2,000 Hz and 400 lines of resolution
Equalization:	± 1 dB typical
Reference PSD: (Profile)	<ul style="list-style-type: none"> Defined by G^2/Hz or $m/s^2/Hz$ – NOW with up to 50 breakpoints Separate alarm/abort limits defined for each segment or overall setting
Random Signal:	True random signal of gaussian amplitude distribution
Sigma Clipping:	User selectable from 1.0 to 4.0 sigma
Pre-test:	Settable from 1 to 20 Db below full test level
Filtering	8-pole anti-alias filters on all signal inputs and drive output
Analysis Windowing	Rectangular, Hamming, Hanning or Blackman selectable
Test Article Protection	Automatic loop check for safety for open loop, low gain, spectral or over/under test and system limits
Displays:	Interactive Windows displays, allowing for real time user display changes Completely zoomable plot. Display types include: <ul style="list-style-type: none"> Reference spectrum Response spectrum for each channel or average of selected channels Transfer function of any channel, drive or test against any other channel Drive output Alarm/abort limits Captured waveforms for each input channel
Test Documentation:	Any of the above screens may be saved or printed out.
Display Monitor	The monitor bar displays the setup conditions, test status, and reference and current displacement, velocity and acceleration values

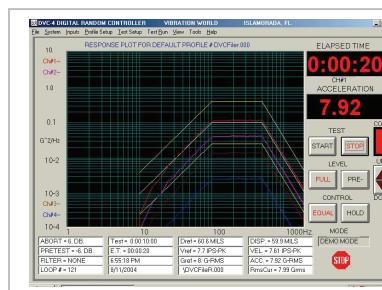

Classical Shock Control Software

CSC

Waveform:	Pre-defined waveforms: half sine, initial/terminal peak Saw tooth, triangular, quarter-sine, parabolic cusp, sine-burst or custom user-generated waveform
Pulse Width:	0.1 to 100 milliseconds for fixed waveform
Analyzing Time:	100 milliseconds to 1 second
Sampling Frequency :	1.28 KHz to 10.24 KHz
Equalization :	Low-level equalization on one channel (Remaining channels available for measurement)
Tolerance:	Alarm and abort, MIL 810, IEC + other standard limits.
Pulse Polarity:	±, Selectable
Pulse Modes:	Single or repetitive pulses, with settable pulse count and rep rate
SRS Analysis:	Acceleration response with 400 line analysis
Pre/Post- Compensation:	Automatic or Manual optimization of pre- and post- shock pulses
Parameters:	Acceleration, velocity & displacement in English or metric units
Test Article Protection:	Automatic loop check for safety for open loop, low gain, over/under test and system limits
Displays:	Interactive Windows displays, allowing for real time user display changes. Display types include: <ul style="list-style-type: none"> • Time Trace ▪ Test Profile ▪ Accelerometer Response of any channel ▪ Acceleration, Velocity or Displacement plots ▪ Drive Waveform ▪ Alarm/Abort limits ▪ Shock Response Spectrum Any of the above screens may be saved or printed out The monitor bar displays the setup conditions, test status, and reference and current displacement, velocity and acceleration values
Test Documentation:	Display Monitor

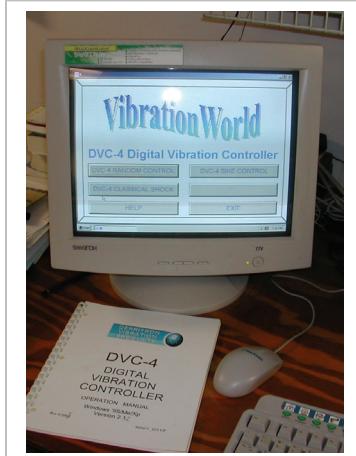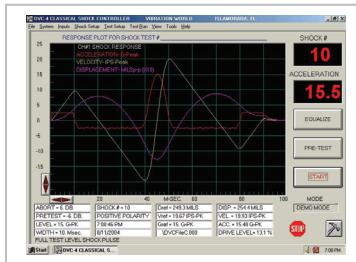

Common Features

Input Channels:	4 channel configuration standard
Input Sensitivity:	Settable from 5 to 1000 mV/g, 20V p-p maximum input each channel (BNC connectors)
Current Sources:	Four, 4 MA each input, 18 VDC compliance, software selectable
Output Channels:	1 Drive channel
Output Level:	16V p-p or 5 Vrms maximum (BNC connector)
Units	English or Metric with auto-conversion of all setup parameters
Operating System:	Microsoft Windows 95/98/Me/NT/2000/Xp/Vista compatible
Display:	Re-sizes automatically for all common screen resolutions
Hard Copy	Any printer supported by the Windows Operating System; color or black & white printouts
Remote Control:	Remote Start/Stop/Abort with external logic signal, switch closure, or by DLL calls for external software control
Test Results	Displayed or Auto-Save, Auto-Print or Auto-Export test results
Export of Data	Industry standard EXCEL file format or to clipboard
Calibration	Software calibration- no trim-pots; calibration procedure in help file and manual
Computer Requirements:	1 GHz Pentium or better; uses 20 Mb memory and 1 PCI card slot. Requires 32 bit OS.
Size	1.5"H x 7.25"W x 15"D
Shipping Weight	8 pounds



Mailing Address: P.O. Box 7963, Northridge, CA 91327

Shipping Address: 621 West Rosecrans #23, Gardena CA 90248

Sales Office: 818.831.0832 – 818.831.0842 (fax) – 877-767-7077(toll-free)

Technical Support Contact: VibrationWorld Attn: Wayne Pauly, Inc., 288 South Drive, Islamorada, Fl., 33036
 Phone: (305) 664-8661, Fax: (305) 853-0568, Web: www.vibrationworld.com, E-mail: waynepauly@usa.net